

Servo motors EMME-AS

FESTO



Festo core product range
Covers 80% of your automation tasks

Worldwide:

Always in stock

Superb:


Festo quality at an attractive price

Easy:

Reduces procurement and storing complexity

★ Ready for dispatch from the Festo factory in 24 hours
Held in stock in 13 service centres worldwide
More than 2200 products

★ Ready for dispatch in 5 days maximum from stock
Assembled for you in 4 service centres worldwide
Up to 6 x 10¹² variants per product series



Servo motors EMME-AS

Key features

FESTO

Everything from a single source

Motors EMME-AS

→ page 3



- Brushless, permanently excited synchronous servo motors
- Reliable, dynamic, precise
- Digital absolute displacement encoder; choose from:
 - Singleturn
 - Multiturn
 - Multiturn with SIL2
- Optimised connection technology
- Winding variants
 - For single-phase motor controller
 - For three-phase motor controller
 - Speed-optimised
- Degree of protection: IP21 (motor shaft)
- Degree of protection: IP65 (motor housing incl. connection technology)
- Optional:
 - Holding brake

Gear units EMGA-EAS/-SAS

→ page 17



- Low-backlash planetary gear unit
- Gear ratio $i = 3$ and 5 , available ex-stock
- Life-time lubrication
- Protection class: IP54
- Other gear unit types, ratios, designs and versions on request

Motor controllers CMMP-AS

→ Internet: cmm



- Digital servo controller (0.5 kVA ... 18 kVA)
- Actuation of AC servo and linear motors
- Integrated EMC filters
- Integrated brake chopper
- Integrated safety functions
- Position controller with closed-loop position control (256 position sets)
- Speed controller
- Torque control via current controller
- Range of control functions
- Interfaces:
 - I/O interface
 - CANopen, standard
 - PROFIBUS DP, optional module
 - DeviceNet, optional module
 - PROFINET RT, optional module
 - EtherCAT, optional module
 - EtherNet/IP, optional module

Motor and encoder cables NEBM



→ page 18



- Suitable for use with energy chains
- Connection technology on motor side with protection to IP65
- Can be used in a wide temperature range

Spanner EADT-S-M2 for mounting the cables NEBM on the motor

→ page 19



The spanner is included in the scope of delivery of the motor cable.

EMC filter CAMF-C5-FC

→ page 20



To reduce EMC interference, use of the EMC filter is recommended for cable lengths ≥ 10 m.

EMC filter required only in combination with motor controller CMMP-AS.

Axial and parallel kits EAMM

→ Internet: eamm



- Defined kits for all electro-mechanical axes from Festo
- Each kit includes the relevant necessary coupling housing, couplings and motor flange as well as all screws
- Optionally with degree of protection IP65

PROFIBUS®, PROFINET®, DeviceNet®, CANopen®, EtherCAT®, EtherNet/IP® is a registered trademark of its respective trademark holder in certain countries.

Servo motors EMME-AS

Type codes

EMME – AS – 60 – S – LS – AM

Type

EMME	Motor
------	-------

Motor type

AS	Servo motor
----	-------------

Motor flange size

40	40 mm
60	60 mm
80	80 mm
100	100 mm

Length

S	Short
M	Medium

Output shaft

–	Smooth shaft
K	Shaft to DIN 6885 (with feather key)

Winding

LS	Low-voltage, standard
LV	Low-voltage, speed-optimised
HS	High-voltage, standard

Electrical connection

A	Angled plug, fixed – outlet direction: shaft
---	--

Measuring unit

S	Absolute encoder, singleturn
M	Absolute encoder, multiturn
MX	Absolute safety encoder, multiturn

Brake

–	None
B	With brake

Servo motors EMME-AS

Technical data

FESTO



Note

Motors and motor controllers from Festo are specially matched to each other. Fault-free operation cannot be guaranteed in combination with third-party controllers.



Technical data			
Flange size		40	
Length		S	M
Winding		LV	LV
Motor			
Nominal voltage	[V DC]	360	360
Nominal current	[A]	0.7	1.2
Continuous current at standstill	[A]	0.8	1.6
Peak current	[A]	3.2	6.4
Rated output	[W]	110	200
Nominal torque	[Nm]	0.12	0.21
Peak torque	[Nm]	0.7	1.4
Torque at standstill	[Nm]	0.18	0.35
Nominal speed	[rpm]	9000	9000
Max. speed	[rpm]	10000	10000
Motor constant	[Nm/A]	0.171	0.175
Voltage constant (phase-to-phase)	[mV/min]	13.5	13.2
Winding resistance	[Ω]	25.6	8.6
Winding inductance	[mH]	9.95	4.51
Total moment of inertia of drive output			
Without brake	[kgcm ²]	0.03	0.054
With brake	[kgcm ²]	0.055	0.079
Shaft load at nominal speed			
Radial	[N]	105	115
Axial	[N]	21	23
Brake			
Operating voltage	[V DC]	24 +6 ... -10%	
Performance	[W]	8	
Holding torque	[Nm]	0.4	
Mass moment of inertia	[kgcm ²]	0.014	

Servo motors EMME-AS

Technical data

Technical data			
Flange size		60	
Length		S	M
Winding		LS	LS
Motor			
Nominal voltage	[V DC]	360	360
Nominal current	[A]	0.8	1.5
Continuous current at standstill	[A]	0.9	1.8
Peak current	[A]	3.6	7.2
Rated output	[W]	190	380
Nominal torque	[Nm]	0.6	1.2
Peak torque	[Nm]	2.8	6.0
Torque at standstill	[Nm]	0.7	1.5
Nominal speed	[rpm]	3000	3000
Max. speed	[rpm]	5131	4925
Motor constant	[Nm/A]	0.750	0.800
Voltage constant (phase-to-phase)	[mV/min]	49.6	51.7
Winding resistance	[Ω]	26.4	9.8
Winding inductance	[mH]	31.9	16.8
Total moment of inertia of drive output			
Without brake	[kgcm ²]	0.22	0.413
With brake	[kgcm ²]	0.319	0.512
Shaft load at nominal speed			
Radial	[N]	250	270
Axial	[N]	50	54
Brake			
Operating voltage	[V DC]	24 +6 ... -10%	
Performance	[W]	11	
Holding torque	[Nm]	2	
Mass moment of inertia	[kgcm ²]	0.086	

Servo motors EMME-AS



Technical data

Technical data					
Flange size		80			
Length		S		M	
Winding		LS	HS	LS	HS
Motor					
Nominal voltage	[V DC]	360	565	360	565
Nominal current	[A]	2.6	1.6	3.7	2.1
Continuous current at standstill	[A]	3.1	1.8	3.9	2.2
Peak current	[A]	12.4	7.2	15.6	8.8
Rated output	[W]	750	720	1000	1000
Nominal torque	[Nm]	2.4	2.3	3.2	3.2
Peak torque	[Nm]	11.2	11.2	14.0	14.0
Torque at standstill	[Nm]	2.8	2.8	3.5	3.5
Nominal speed	[rpm]	3000	3000	3000	3000
Max. speed	[rpm]	4690	4192	4627	4097
Motor constant	[Nm/A]	0.923	1.438	0.865	1.524
Voltage constant (phase-to-phase)	[mV/min]	54.3	95.3	55	97.5
Winding resistance	[Ω]	4.6	14.2	2.8	9.0
Winding inductance	[mH]	9.46	30.0	7.43	22.8
Total moment of inertia of drive output					
Without brake	[kgcm ²]	1.40		1.93	
With brake	[kgcm ²]	1.68		2.20	
Shaft load at nominal speed					
Radial	[N]	350		360	
Axial	[N]	70		72	
Brake					
Operating voltage	[V DC]	24 +6 ... -10%		24 +6 ... -10%	
Performance	[W]	12		12	
Holding torque	[Nm]	4.5		4.5	
Mass moment of inertia	[kgcm ²]	0.222		0.222	

Servo motors EMME-AS

Technical data

Technical data			
Flange size		100	
Length		S	M
Winding		HS	HS
Motor			
Nominal voltage	[V DC]	565	565
Nominal current	[A]	3.0	4.1
Continuous current at standstill	[A]	3.4	4.6
Peak current	[A]	13.6	18.4
Rated output	[W]	1500	2000
Nominal torque	[Nm]	4.8	6.4
Peak torque	[Nm]	22.4	30.0
Torque at standstill	[Nm]	5.6	7.5
Nominal speed	[rpm]	3000	3000
Max. speed	[rpm]	3910	3941
Motor constant	[Nm/A]	1.600	1.561
Voltage constant (phase-to-phase)	[mV/min]	102.2	101.4
Winding resistance	[Ω]	4.6	3.2
Winding inductance	[mH]	15.5	12.0
Total moment of inertia of drive output			
Without brake	[kgcm ²]	4.84	6.41
With brake	[kgcm ²]	5.63	7.20
Shaft load at nominal speed			
Radial	[N]	650	680
Axial	[N]	130	136
Brake			
Operating voltage	[V DC]	24 +6 ... -10%	
Performance	[W]	18	
Holding torque	[Nm]	9.0	
Mass moment of inertia	[kgcm ²]	0.654	

Servo motors EMME-AS

Technical data

Safety characteristics – Encoder									
Type	EMME-AS-...-S				EMME-AS-...-M				
Flange size	40	60	80	100	40	60	80	100	
Measuring unit	Absolute, Singleturn (SEK 34/37)				Absolute, Multiturn (SEL 34/37)				
Rotary position encoder									
MTTFd ¹⁾	Years	340			271				
Holding brake									
MTTF	Years	371	538	797	1037	371	538	797	1037
Switching cycles ²⁾		5 million idle actuations							

1) Fault exclusions for the mechanical encoder connection are not possible

2) Guide value for the number of switching actuations (release/apply) during exclusive use as holding brake without friction (i.e. jamming at standstill)

Technical data – Encoder				
Type	EMME-AS-...-S		EMME-AS-...-M	
Measuring unit	Absolute, Singleturn (SEK 34/37)		Absolute, Multiturn (SEL 34/37)	
Operating voltage	[V DC]	7 ... 12 (±5%)		
Interface signals/protocol – HIPERFACE®				
Measuring principle	Capacitive			
Process data channel	SIN, REFSIN, COS, REFCOS (analogue differential)			
Sinusoidal/cosinusoidal periods per revolution	16			
Parameter channel	RS485 (digital)			
Absolute position values per revolution	512 (resolution 9 bit)			
Maximum speed				
For absolute value generation	[rpm]	6000		
Mechanical	[rpm]	12000		
Revolutions	1	4096 revolutions, 12 bits		
Interpolation of sine/cosine signals in the motor controller ¹⁾				
Measurement step at e.g. 12 bit per period	20" (angular seconds) $[360°/16/2^{12}=20"]$			
Angular accuracy	±20' (angular minutes)			

1) Dependent on the motor controller.

Weight [kg] – Encoder								
Flange size	40		60		80		100	
Length	S	M	S	M	S	M	S	M
Without brake	0.6	0.7	1.7	2.2	3.4	4.1	6.3	7.3
With brake	0.7	0.8	2.0	2.6	4.1	4.8	7.3	8.3

HIPERFACE® is a registered trademark of its respective trademark holder in certain countries.

Servo motors EMME-AS

Technical data

Safety characteristics – Encoder with SIL transmitter ¹⁾	
Type	EMME-AS-...-MX
Measuring unit	Absolute, Multiturn (SKM36S)
Rotary position encoder	
MTTFd	874 years
Performance Level (PL) to EN ISO 13849-1	Category 3, Performance Level d
Safety integrity level (SIL) to EN 62061, EN 61508	SIL2
PFHd	1.3×10^{-8}
T _M (duration of use)	20 years
CE marking (see declaration of conformity)	To EU EMC Directive ²⁾

- 1) Relevant documents from SICK AG → www.sick.com:
Description of HIPERFACE® Interface
Implementation Manual HIPERFACE® Safety
Operating instructions for SKM36S Stand-Alone
- 2) For information about the applicability of the component see the manufacturer's EC declaration of conformity at: www.festo.com/sp → User documentation.
If the component is subject to restrictions on usage in residential, office or commercial environments or small businesses, further measures to reduce the emitted interference may be necessary.

Technical data – Encoder with SIL transmitter	
Type	EMME-AS-...-MX
Measuring unit	Absolute, Multiturn (SKM36S)
Operating voltage [V DC]	7 ... 12 (±5%)
Interface signals/protocol – HIPERFACE®	
Measuring principle	Optical
Process data channel	SIN, REFSIN, COS, REFCOS (analogue differential)
Sinusoidal/cosinusoidal periods per revolution	128
Parameter channel	RS485 (digital)
Absolute position values per revolution	4096 (resolution 12 bit)
Maximum speed	
For absolute value generation [rpm]	9000
Mechanical [rpm]	9000
Revolutions	4096 revolutions, 12 bits
Interpolation of sine/cosine signals in the motor controller ¹⁾	
Measurement step at e.g. 12 bit per period	2.5" (angular seconds) [$360^\circ/128/2^{12}=2.5''$]
Angular accuracy	±20' (angular minutes)

- 1) Dependent on the motor controller.

Weight [kg] – Encoder with SIL transmitter						
Flange size	60		80		100	
Length	S	M	S	M	S	M
Without brake	1.7	2.2	3.4	4.1	6.3	7.3
With brake	2.0	2.6	4.1	4.8	7.3	8.3

HIPERFACE® is a registered trademark of its respective trademark holder in certain countries.

Servo motors EMME-AS


Technical data

Operating and environmental conditions	
Standard	IEC60034
Protection class	
Motor shaft	IP21
Motor housing incl. connection technology	IP65
Ambient temperature [°C]	-10 ... +40 (up to 100 °C with derating of 1.5% per degree Celsius)
Storage temperature [°C]	-20 ... +70
Insulation protection class	F (155 °C)
Temperature monitoring	Not integrated, only via I ² t temperature monitoring model of the motor controller
Rating class to EN 60034-1	S1 (continuous operation)
Thermal class to EN 60034-1	F (155 °C)
Relative air humidity [%]	0 ... 90 (non-condensing)
CE marking (see declaration of conformity)	To EU Low Voltage Directive To EU EMC Directive ¹⁾
Approval certificate	c UL us Recognized (OL) RCM mark
Note on materials	RoHS compliant Contains paint-wetting impairment substances

1) For information about the applicability of the component see the manufacturer's EC declaration of conformity at: www.festo.com/sp → User documentation.
If the component is subject to restrictions on usage in residential, office or commercial environments or small businesses, further measures to reduce the emitted interference may be necessary.


Pin allocation – Motor side

Motor (M16, pins)



PIN	Function
U	Phase U
V	Phase V
W	Phase W
⏚	PE Protective earth
+	Brake BR+
-	Brake BR-
1	n.c.
2	n.c.

Encoder (M12, pins)



PIN	Function
1	0 V
2	Us (7 ... 12 V DC)
3	Data+ (RS485)
4	Data- (RS485)
5	SIN+
6	SIN- (REFSIN)
7	COS+
8	COS- (REFCOS)


Servo motors EMME-AS

Technical data


Torque M as a function of speed n

Flange size 40

Length S
Winding LV

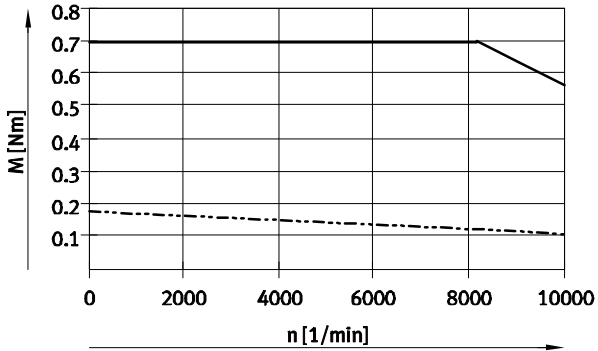


Length M
Winding LV

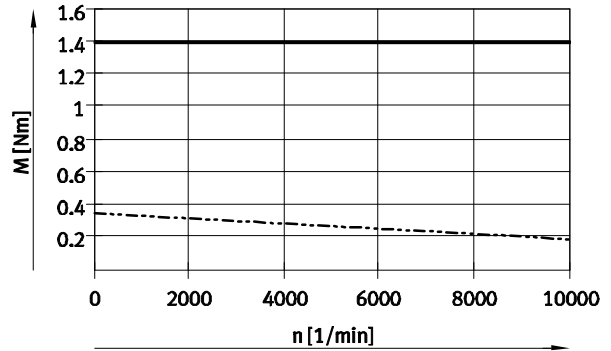


Flange size 60

Length S
Winding LS

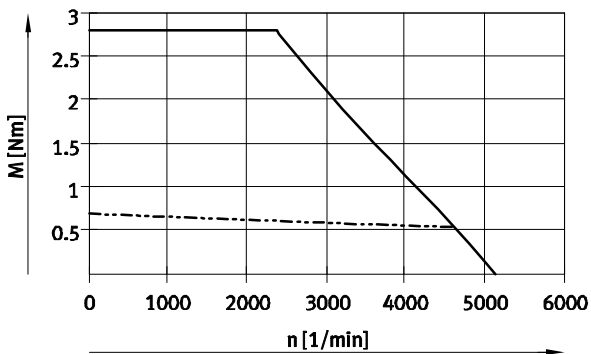

Length M
Winding LS

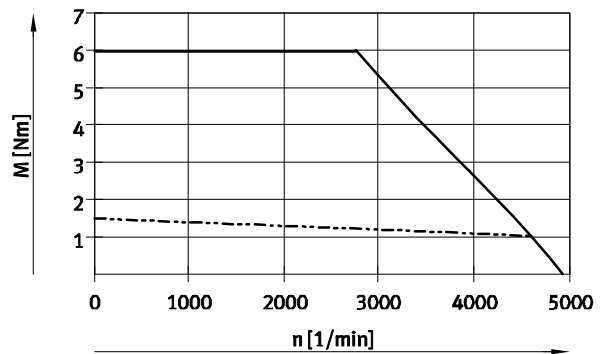

- Peak torque
- - - - - Nominal torque

Note

Typical motor characteristic curve with nominal voltage and optimal controller.


Servo motors EMME-AS

Technical data


Torque M as a function of speed n

Flange size 80

Length S
Winding LS

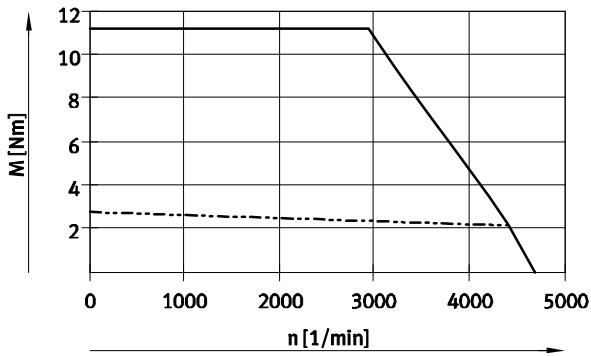


Length S
Winding HS

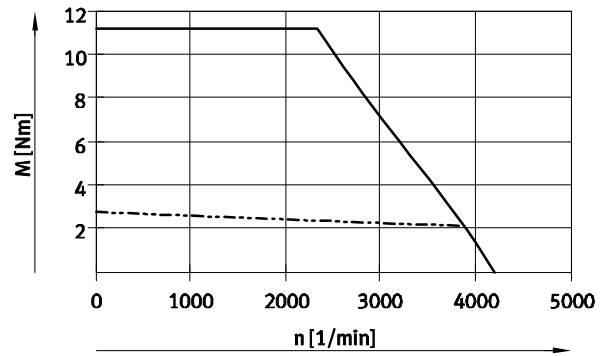


Flange size 80

Length M
Winding LS

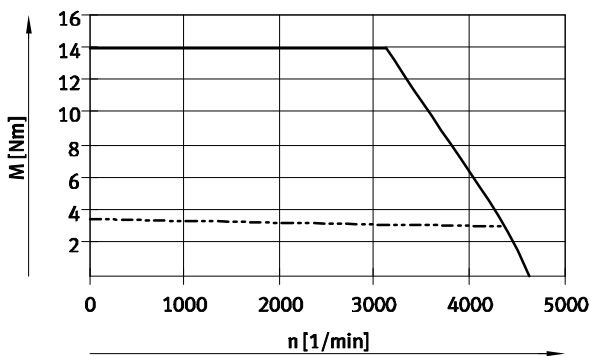

Length M
Winding HS

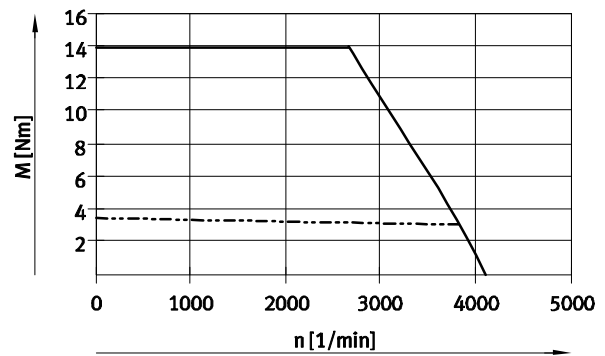

- Peak torque
- - - - - Nominal torque

-  - Note

Typical motor characteristic curve with nominal voltage and optimal controller.


Servo motors EMME-AS

Technical data


Torque M as a function of speed n

Flange size 100

Length S
Winding HS

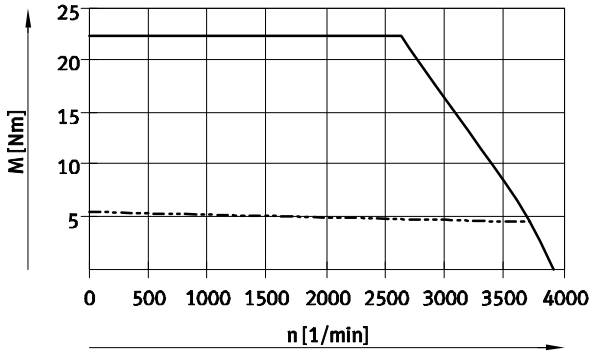

Length M
Winding HS

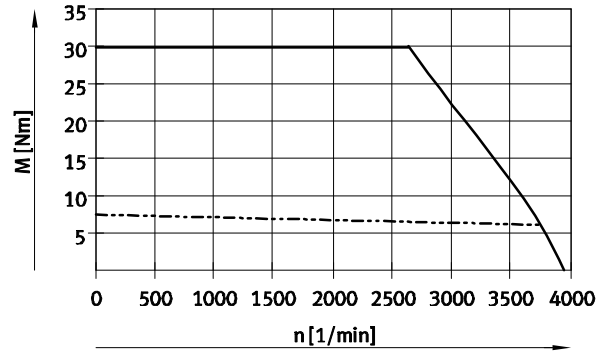

— Peak torque
- - - - - Nominal torque


- - - - - Note

Typical motor characteristic curve with nominal voltage and optimal controller.

Servo motors EMME-AS

Technical data

FESTO

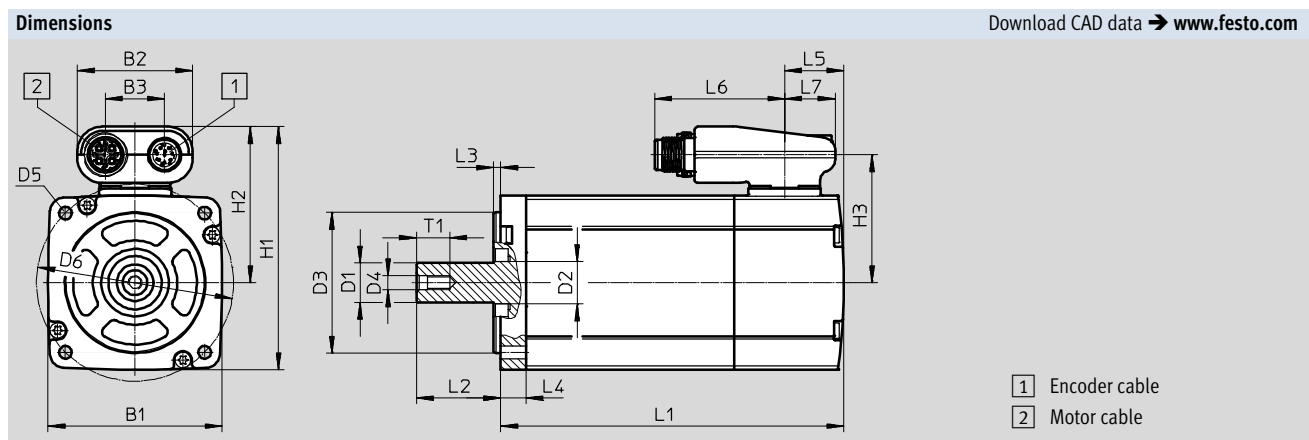

Flange size	Overall length	B1	B2	B3	D1 ∅ h6	D2 ∅	D3 ∅ h7	D4
40	S	40	41	21	8	10	30	M3
	M							
60	S	62	41	21	14	15	50	M5
	M							
80	S	82	41	21	19	20	70	M6
	M							
100	S	102	41	21	19	25	95	M6
	M							

Flange size	Overall length	D5 ∅	D6 ∅ ±0.3	H1	H2	H3	L1	
							±2	With brake ±2
40	S	3.4	45	68.5	48.5	38.5	89	124
	M						114	149
60	S	4.5	70	86.5	55.5	45.5	122	156
	M						152	186
80	S	5.5	90	106.5	65.5	55.5	158	200
	M						178	220
100	S	9	115	126.5	75.5	65.5	200	242
	M						225	267

Flange size	Overall length	L2	L3 ±0.2	L4 ±0.3	L5	L6	L7	T1
40	S	20+0.5/-0.7	2.5	4.5	25.3	46.2	18	9
	M							
60	S	30+0.5/-0.2	2.5	9	21	46.2	18	12.5
	M							
80	S	35+0.4/-0.2	3	10	23	46.2	18	16
	M							
100	S	40+0.4/-0.2	3	12	25.5	46.2	18	16
	M							

Servo motors EMME-AS

Technical data

FESTO

★ Core product range

Ordering data											Part No.	Type
Overall length		Winding			Measuring unit			With feather key	Brake			
Short	Medium	Low-voltage, Standard	Low-voltage, Speed-optimised	High-voltage, Standard	Encoder, Singleturn	Encoder, Multiturn	Encoder, Multiturn with SIL transmitter					
Flange size 40												
■			■		■						★ 2082428	EMME-AS-40-S-LV-AS
■			■		■				■		★ 2082430	EMME-AS-40-S-LV-ASB
■			■			■					★ 2082429	EMME-AS-40-S-LV-AM
■			■			■			■		★ 2082431	EMME-AS-40-S-LV-AMB
	■		■		■						★ 2082444	EMME-AS-40-M-LV-AS
	■		■		■				■		★ 2082446	EMME-AS-40-M-LV-ASB
	■		■			■					★ 2082445	EMME-AS-40-M-LV-AM
	■		■			■			■		★ 2082447	EMME-AS-40-M-LV-AMB
Flange size 60												
■			■		■						★ 2089698	EMME-AS-60-S-LS-AS
■			■		■				■		★ 2089700	EMME-AS-60-S-LS-ASB
■			■			■					★ 2089699	EMME-AS-60-S-LS-AM
■			■			■			■		★ 2089701	EMME-AS-60-S-LS-AMB
	■		■		■						★ 2089730	EMME-AS-60-M-LS-AS
	■		■		■				■		★ 2089732	EMME-AS-60-M-LS-ASB
	■		■			■					★ 2089731	EMME-AS-60-M-LS-AM
	■		■			■			■		★ 2089733	EMME-AS-60-M-LS-AMB
Flange size 80												
■			■		■						★ 2093104	EMME-AS-80-S-LS-AS
■			■		■				■		★ 2093106	EMME-AS-80-S-LS-ASB
■			■			■					★ 2093105	EMME-AS-80-S-LS-AM
■			■			■			■		★ 2093107	EMME-AS-80-S-LS-AMB
■				■	■						★ 2093136	EMME-AS-80-S-HS-AS
■				■	■				■		★ 2093138	EMME-AS-80-S-HS-ASB
■				■		■					★ 2093137	EMME-AS-80-S-HS-AM
■				■		■			■		★ 2093139	EMME-AS-80-S-HS-AMB
	■		■		■						★ 2093168	EMME-AS-80-M-LS-AS
	■		■		■				■		★ 2093170	EMME-AS-80-M-LS-ASB
	■		■			■					★ 2093169	EMME-AS-80-M-LS-AM
	■		■			■			■		★ 2093171	EMME-AS-80-M-LS-AMB
	■			■	■						★ 2093200	EMME-AS-80-M-HS-AS
	■			■	■				■		★ 2093202	EMME-AS-80-M-HS-ASB
	■			■		■					★ 2093201	EMME-AS-80-M-HS-AM
	■			■		■			■		★ 2093203	EMME-AS-80-M-HS-AMB
Flange size 100												
■				■	■						★ 2103467	EMME-AS-100-S-HS-AS
■				■	■				■		★ 2103469	EMME-AS-100-S-HS-ASB
■				■		■					★ 2103468	EMME-AS-100-S-HS-AM
■				■		■			■		★ 2103470	EMME-AS-100-S-HS-AMB
	■			■	■						★ 2103499	EMME-AS-100-M-HS-AS
	■			■	■				■		★ 2103501	EMME-AS-100-M-HS-ASB
	■			■		■					★ 2103500	EMME-AS-100-M-HS-AM
	■			■		■			■		★ 2103502	EMME-AS-100-M-HS-AMB

Festo core product range

- ★ Generally ready for shipping ex works in 24 hours
- ★ Generally ready for shipping ex works in 5 days

Servo motors EMME-AS

Technical data

Ordering data											
Overall length		Winding			Measuring unit			With feather key	Brake	Part No.	Type
Short	Medium	Low-voltage, Standard	Low-voltage, Speed-optimised	High-voltage, Standard	Encoder, Singleturn	Encoder, Multiturn	Encoder, Multiturn with SIL transmitter				
Flange size 60											
■		■					■			4267572	EMME-AS-60-S-LS-AMX
■		■					■		■	4267573	EMME-AS-60-S-LS-AMXB
■		■					■	■		4267574	EMME-AS-60-SK-LS-AMX
■		■					■	■	■	4267575	EMME-AS-60-SK-LS-AMXB
	■	■					■			4267576	EMME-AS-60-M-LS-AMX
	■	■					■		■	4267577	EMME-AS-60-M-LS-AMXB
	■	■					■	■		4267578	EMME-AS-60-MK-LS-AMX
	■	■					■	■	■	4267579	EMME-AS-60-MK-LS-AMXB
Flange size 80											
■		■					■			4267580	EMME-AS-80-S-LS-AMX
■		■					■		■	4267581	EMME-AS-80-S-LS-AMXB
■		■					■	■		4267582	EMME-AS-80-SK-LS-AMX
■		■					■	■	■	4267583	EMME-AS-80-SK-LS-AMXB
■				■			■			4267584	EMME-AS-80-S-HS-AMX
■				■			■		■	4267585	EMME-AS-80-S-HS-AMXB
■				■			■	■		4267586	EMME-AS-80-SK-HS-AMX
■				■			■	■	■	4267587	EMME-AS-80-SK-HS-AMXB
	■	■					■			4267588	EMME-AS-80-M-LS-AMX
	■	■					■		■	4267589	EMME-AS-80-M-LS-AMXB
	■	■					■	■		4267590	EMME-AS-80-MK-LS-AMX
	■	■					■	■	■	4267591	EMME-AS-80-MK-LS-AMXB
	■			■			■			4267592	EMME-AS-80-M-HS-AMX
	■			■			■		■	4267593	EMME-AS-80-M-HS-AMXB
	■			■			■	■		4267594	EMME-AS-80-MK-HS-AMX
	■			■			■	■	■	4267595	EMME-AS-80-MK-HS-AMXB
Flange size 100											
■				■			■			4267596	EMME-AS-100-S-HS-AMX
■				■			■		■	4267597	EMME-AS-100-S-HS-AMXB
■				■			■	■		4267598	EMME-AS-100-SK-HS-AMX
■				■			■	■	■	4267599	EMME-AS-100-SK-HS-AMXB
	■			■			■			4267600	EMME-AS-100-M-HS-AMX
	■			■			■		■	4267601	EMME-AS-100-M-HS-AMXB
	■			■			■	■		4267602	EMME-AS-100-MK-HS-AMX
	■			■			■	■	■	4267603	EMME-AS-100-MK-HS-AMXB


Festo core product range

- ★ Generally ready for shipping ex works in 24 hours
- ☆ Generally ready for shipping ex works in 5 days

Servo motors EMME-AS

Accessories

FESTO

Ordering data – Gear unit				
	Motor interface	Gear ratio	Part No.	Type
	40P	3	★ 2297684	EMGA-40-P-G3-EAS-40
		5	★ 2297685	EMGA-40-P-G5-EAS-40
	60P	3	★ 2297686	EMGA-60-P-G3-EAS-60
		5	★ 2297687	EMGA-60-P-G5-EAS-60
	80P	3	★ 2297690	EMGA-80-P-G3-EAS-80
		5	★ 2297691	EMGA-80-P-G5-EAS-80
	100A	3	★ 552194	EMGA-80-P-G3-SAS-100
		5	★ 552195	EMGA-80-P-G5-SAS-100
		3	★ 552196	EMGA-120-P-G3-SAS-100
		5	★ 552197	EMGA-120-P-G5-SAS-100

Servo motors EMME-AS

Accessories


FESTO

Technical data – Cables		
Description	Motor cable	
For motor	EMME-AS-40/60	EMME-AS-80/100
Type	NEBM-M16G8-...-Q7-...	NEBM-M16G8-...-Q9-...
Cable composition	2x (2x 0.25 mm ²) (3 A, 48 V, 0.5 KV)	2x (2x 0.5 mm ²) (8 A, 300 V, 2.5 KV)
	4x 0.75 mm ² (12 A, 600 V, 2.5 KV)	4 x 1.5 mm ² (16 A, 600 V, 2.5 KV)
	Screened	
Degree of contamination	3	
Min. bending radius [mm]	55	64
Ambient temperature [°C]	-50 ... +90	
Ambient temperature ¹⁾ [°C]	-40 ... +90	
Cable characteristic	Suitable for use with energy chains	
Degree of protection	IP65 (in assembled state)	
Material	Polyurethane	
Note on materials	RoHS compliant	
CE marking (see declaration of conformity)	To EU Low Voltage Directive	

Description	Encoder cable	
For motor	EMME-AS-40/60/80/100	
Type	NEBM-M12G8-...	
Cable composition	4x (2x 0.14 mm ²)	
	Screened	
Degree of contamination	3	
Min. bending radius [mm]	68	
Ambient temperature [°C]	-40 ... +80	
Ambient temperature ¹⁾ [°C]	-5 ... +80	
Cable characteristic	Suitable for use with energy chains	
Degree of protection	IP65 (in assembled state)	
Material	Polyurethane	
Note on materials	RoHS compliant	

1) With flexible cable installation

Recommended cable cross section as a function of cable length l and max. motor current I_0

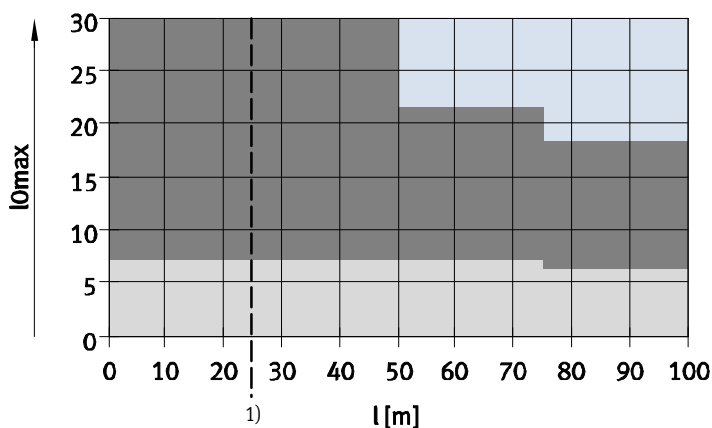



1) Cable lengths > 25 m possible following technical clarification; up to 99.9 m on request.

No standard
 1.5 mm²
 0.75 mm²


Servo motors EMME-AS

Accessories


FESTO

Ordering data			
	Cable length [m]	Part No.	Type
Motor cable			
	For EMME-AS-40/60 with CMMP-AS (cable cross section: 0.75 mm ²)		
	2.5	★ 8004662	NEBM-M16G8-E-2.5-Q7-LE8
	5	★ 8003770	NEBM-M16G8-E-5-Q7-LE8
	7.5	★ 8004663	NEBM-M16G8-E-7.5-Q7-LE8
	10	★ 8003771	NEBM-M16G8-E-10-Q7-LE8
	15	★ 8003772	NEBM-M16G8-E-15-Q7-LE8
	X length ¹⁾	8003773	NEBM-M16G8-E--Q7-LE8
	For EMME-AS-40/60 with CMMT-AS (cable cross section: 0.75 mm ²)		
	2.5	5391541	NEBM-M16G8-E-2.5-Q7-LE8-1
	5	5391543	NEBM-M16G8-E-5-Q7-LE8-1
	7.5	5391548	NEBM-M16G8-E-7.5-Q7-LE8-1
	10	8085952	NEBM-M16G8-E-10-Q7-LE8-1
	15	8085953	NEBM-M16G8-E-15-Q7-LE8-1
X length ¹⁾	8085954	NEBM-M16G8-E-...-Q7-LE8-1	
	For EMME-AS-80/100 with CMMP-AS (cable cross section: 1.5 mm ²)		
	2.5	★ 8004660	NEBM-M16G8-E-2.5-Q9-LE8
	5	★ 8003766	NEBM-M16G8-E-5-Q9-LE8
	7.5	★ 8004661	NEBM-M16G8-E-7.5-Q9-LE8
	10	★ 8003767	NEBM-M16G8-E-10-Q9-LE8
	15	★ 8003768	NEBM-M16G8-E-15-Q9-LE8
	X length ¹⁾	8003769	NEBM-M16G8-E--Q9-LE8
	For EMME-AS-80/100 with CMMT-AS (cable cross section: 1.5 mm ²)		
	2.5	5391540	NEBM-M16G8-E-2.5-Q9-LE8-1
	5	5391545	NEBM-M16G8-E-5-Q9-LE8-1
	7.5	5391547	NEBM-M16G8-E-7.5-Q9-LE8-1
	10	5391549	NEBM-M16G8-E-10-Q9-LE8-1
	15	5391550	NEBM-M16G8-E-15-Q9-LE8-1
X length ¹⁾	5392489	NEBM-M16G8-E-...-Q9-LE8-1	

1) Cable length can be selected between 0.5 ... 99.9 m in increments of 0.1 m.

 Note

Cable lengths > 25 m possible following technical clarification.
The max. cable length for motors with holding brake is 50 m.

Ordering data – Spanner			
	Description	Part No.	Type
	Spanner for mounting the cables on the motor.	8074249	EADT-S-M2
	The spanner is included in the scope of delivery of the motor cable.		



Festo core product range

- ★ Generally ready for shipping ex works in 24 hours
- ★ Generally ready for shipping ex works in 5 days

Servo motors EMME-AS

Accessories

FESTO

Ordering data			
	Cable length [m]	Part No.	Type
Encoder cable			
	For EMME-AS-40/60/80/100 with CMMP-AS		
	2.5	★ 8004664	NEBM-M12G8-E-2.5-N-S1G15
	5	★ 8003762	NEBM-M12G8-E-5-N-S1G15
	7.5	★ 8004665	NEBM-M12G8-E-7.5-N-S1G15
	10 ²⁾	★ 8003763	NEBM-M12G8-E-10-N-S1G15
	15 ²⁾	★ 8003764	NEBM-M12G8-E-15-N-S1G15
	X length ¹⁾²⁾	8003765	NEBM-M12G8-E--N-S1G15
	For EMME-AS-40/60/80/100 with CMMT-AS		
	2.5	5212312	NEBM-M12G8-E-2.5-N-R3G8
	5	5212313	NEBM-M12G8-E-5-N-R3G8
	7.5	5212314	NEBM-M12G8-E-7.5-N-R3G8
	10	5212315	NEBM-M12G8-E-10-N-R3G8
	15	5212316	NEBM-M12G8-E-15-N-R3G8
	X-Länge ¹⁾	5212317	NEBM-M12G8-E-...-N-R3G8

1) Cable length can be selected between 0.5 ... 99.9 m in increments of 0.1 m.


2) EMC-filter CAMF-C5-FC included in the delivery.

Ordering data – EMC filter

To reduce EMC interference, use of the EMC filter is recommended for cable lengths ≥ 10 m.

The filter is included in the scope of delivery for encoder cables ≥ 10 m.

EMC filter required only in combination with motor controller CMMP-AS.

	Degree of protection	Ambient temperature	Part No.	Type
	IP30 (in mounted state)	-40 ... +80 °C	4825847	CAMF-C5-FC

Festo core product range

★ Generally ready for shipping ex works in 24 hours

☆ Generally ready for shipping ex works in 5 days

Festo - Your Partner in Automation



1 Festo Inc.
5300 Explorer Drive
Mississauga, ON L4W 5G4
Canada

Festo Customer Interaction Center
Tel: 1 877 463 3786
Fax: 1 877 393 3786
Email: customer.service.ca@festo.com



2 Festo Pneumatic
Av. Ceylán 3,
Col. Tequesquináhuac
54020 Tlalneantla,
Estado de México

Multinational Contact Center
01 800 337 8669
ventas.mexico@festo.com



3 Festo Corporation
1377 Motor Parkway
Suite 310
Islandia, NY 11749

Festo Customer Interaction Center
1 800 993 3786
1 800 963 3786
customer.service.us@festo.com



4 Regional Service Center
7777 Columbia Road
Mason, OH 45040

Connect with us



www.festo.com/socialmedia



www.festo.com

Subject to change